

ATCA-F140

40G AdvancedTCA® Switch Blade

DATA SHEET

High bandwidth, 40G switch blade design for AdvancedTCA platforms

- PICMG® 3.0 compliant base interface switch
- PICMG 3.1 compliant fabric interface supporting 1G, 10G, and 40G
- Single AMC site
- Optional SATA HDD or SSD
- Optional Telecom clocking support
- Integrated software package
- Designed for NEBS/ETSI compliance


AdvancedTCA®

DESIGNED & ASSEMBLED IN
★ USA

The ATCA-F140 from SMART Embedded Computing is a high performance, high bandwidth 40G switch blade providing the networking infrastructure for SMART EC AXP1440 and Centellis® 4440 platforms. This product is perfect for the most bandwidth intensive telecom and defense applications. Along with the maximum fabric bandwidth available, the ATCA-F140 includes several features to maximize platform cost effectiveness.

The total aggregated 480G internal fabric interface switching and routing throughput paired with 160G of external connectivity is the basis for forming platform solutions in packet oriented bandwidth hungry environments like 4G wireless and video transport. Combining several functions within a single blade design allows end users to maximize billable Centellis platform slots with revenue-generating application blades. This is accomplished with a combination of factory build options as well as several field options. Optional functions include telecom clock generation and distribution, SATA based disk drives and an AdvancedMC™ (AMC) site for general processing and/or packet processing functions.

A powerful on-board service processor executes all L2 and L3 switch functions, blade setup and hardware platform management functions independent of any processor AMC and/or SATA drive installed. This allows full, 100% utilization of the AMC based processor for end-user applications.

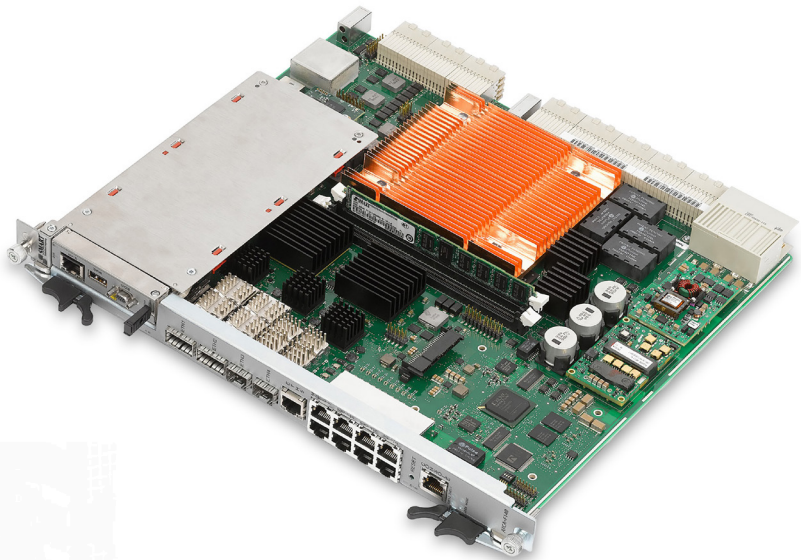



Hardware

SERVICE PROCESSOR

- NXP® QorIQ® P2020, dual-core processor, 1.0GHz

MEMORY

- Up to 4GB ECC-protected SDRAM, via (2) DDR3 memory DIMMs
 - Factory default – 2GB
- 64MB boot flash (NOR), dual-bank architecture
- 2GB (more possible) application flash
- 16MB CPU reset-persistent memory

BASE AND FABRIC INTERFACES

- PICMG 3.0 base interface switching – Gigabit Ethernet (1G)
- PICMG 3.1 fabric interface switching – 1G, 10G, 4 x 10G (KR), and 40G

AMC SITE

- Single AMC slot
- Mid-size AMC (AMC.0, AMC.1, AMC.2 and AMC.3 compliant)

STORAGE BAY

- Single HDD or solid state drive (SSD) bay
- Direct mount installation
- Standard SATA interface
 - Default configuration – NXP P2020 service processor via SATA bridge
 - Optional configuration – connection to AMC, port 2

FRONT PANEL INTERFACES

- Service processor
 - 1G Ethernet, RJ-45
 - RS-232 serial, RJ-45
- Base interface
 - 2x 10G Ethernet, SFP+
- Fabric interface
 - 2x 40G Ethernet, QSFP+
- Telecom Clock interfaces
 - 5x Inter-shelf interfaces, RJ-45
 - 1x Master/Slave interface, RJ-45
 - 2x BITS/SSU interfaces, RJ-45

REAR TRANSITION MODULE (RTM)

RTM-ATCA-F140

- Base interface
 - 2x 10G Ethernet, SFP+
 - 4x 1G Ethernet, SFP+

- Fabric interface
 - 4x 10G Ethernet, SFP+
 - 1x 40G Ethernet, QSFP+

BLADE DIMENSIONS

- 8U form factor, 280 mm x 322.5 mm, single slot

RELEVANT STANDARDS

- PICMG 3.0 (form factor, IPMI, base interface, hot swap, RTM)
- PICMG 3.1
- Telcordia GR-1244-CORE [5] (if equipped with Telecom Clock function)
- ANSI T1.101 [9] (if equipped with Telecom Clock function)

OPERATING ENVIRONMENT

- Operating temperature range:
 - 5 °C to +55 °C @ 90% non-condensing humidity
- Storage temperature range:
 - 40 °C to +70 °C @ 95% relative humidity

Telecom Clock Characteristics (if equipped)

TELECOM CLOCK CHIP

- Semtech Topsynt ACS9510

MODES OF OPERATION

- T0 normal operation: During normal (locked) operation, the T0 clocks shall be locked to the selected T1, T2 or T3 reference source.
- T0 free-run operation: During free-running mode, the T0 clocks shall be derived from the local oscillator.
- T0 hold-over operation: During holdover mode, the T0 clocks shall be based on the most recent valid reference available.
- T4 normal operation: During normal (locked) operation, the T4 clocks shall be locked to the selected T1 or T2 reference source.
- T4 hold-over and free-run operation: During free-running and holdover mode, the T4 clock shall be suppressed.

TIMING REFERENCE

- Traditional signal-based reference as defined by ITU-T G812 & G813 [3 & 4]
- Telcordia GR-1244-CORE [5]
- IEEE 1588v2

PERFORMANCE

- Stratum 3



SRstackware® Software

- L2 switch management software based on Linux providing a rich selection of features and protocols, e.g.
 - STP/RSTP/MSTP
 - VLAN, VLAN stacking (Q-in-Q)
 - LACP
 - Flow Control
 - Class of Service
 - GARP/GMRP/GVRP
 - SNMPv2, SNMPv3
 - ACL
- L3 switch management (optional ATCA-F140 add-on product)
 - IGMP v1/v2/v3, IGMP snooping/proxy
 - RIPv2, RIPv6
 - OSPFv2
 - VRRP

Regulatory Compliance	
Item	Description
Designed to comply with NEBS	Telcordia GR-63-CORE, NEBS Physical Protection, Level 3
	Telcordia GR-1089-CORE, Electromagnetic Compatibility and Electrical Safety – Generic Criteria for Network Telecommunications Equipment. Level 3, Equipment Type 2
Designed to comply with ETSI	ETSI Storage, ETS 300 019-2-1, Class 1.2 equipment, Weather Protected, not Temperature Controlled Storage Locations
	ETSI Transportation, ETS 300 019-1-2, Class 2.3 equipment, Public Transportation
	ETSI Operation, ETS 300 019-1-3, Class 3.1(E) equipment, Partly Temperature Controlled Locations
	ETSI EN 300-132-2 Environmental Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc)
	ETS-300-753, Equipment Engineering (EE); Acoustic noise emitted by telecommunications equipment
EMC	ETSI EN 300 386 Electromagnetic compatibility and Radio spectrum Matters (ERM); telecommunication network equipment; ElectroMagnetic Compatibility (EMC) requirements, Telecommunication equipment room (attended)
	FCC 47 CFR Part 15 Subpart B (US), Class A
	ECISPR 22, Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment
	AS/NZS CISPR 22 (Australia/New Zealand), Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment
	VCCI Class A (Japan), Voluntary Control Council for Interference by Information Technology Equipment
	Industry Canada ICES-003 Class A
Safety	Compliance to UL/CSA 60950-1, EN 60950-1 and IEC 60950-1 CB Scheme. Marked with U.S. NRTL, Canadian Safety and CE Mark.
RoHS/WEEE compliance	Directives 2011/65/EU / 2015/863 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL on the restriction of the use of certain hazardous substances in electrical and electronic equipment. (RoHS)
	DIRECTIVE 2002/96/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL on waste electrical and electronic equipment (WEEE)
CE Conformity	Directive 2004/108/EC, Directive 2006/95/EC

ATCA-F140 DATA SHEET



Ordering Information	
Part Number	Description
Switch Blade Products	
ATCA-F140	ATCA system controller & switch blade with 40G fabric
ATCA-F140-TCLK3	ATCA system controller & switch blade with 40G fabric & telecom clock Stratum 3
Optional Switch Blade Products	
RTM-ATCA-F140	RTM for the ATCA-F140 with SFPP & SFP sockets
SFP-MM-SX-LC	1G single form factor (SFP) module - 850 NM, SX, LC connector
SFP-CO-RJ-45	1G copper single form factor (SFP+) module - RJ-45 connector
SFPP-MM-SR-LC	10G single form factor plus (SFPP) module - 850 NM, SR, LC connector
SFPP-SM-LR-LC	10G single form factor plus (SFPP) module - 1310 NM, LR, LC connector
SFPP-CO-RJ-45-3M	10G copper single form factor plus (SFP+) modules with molded cable (3M)
QSFP-40G-SR4-MOD	40G QSFP+ module for the ATCA-F140 - 40 GBASE-SR4
CABLE-OPT-QSFP-5M	40G QSFP+ optical cable for ATCA-F140 (5M)
CBL-B-OPT-QSFP-5M	4G QSFP+ optical cable break-out for ATCA-F140 (5M)
PRAMC-7311-16 GB	AMC with Intel® Core™ i7-2655LE Processor, 2.2GHZ, 16GB DDR3 - mid size
SSD-480G-SATA-1	480GB MLC 2.5 inch SSD with mounting kit for ATCA-F125 and ATCA-F140
SSD-960G-SATA-1	960GB MLC 2.5 inch SSD with mounting kit for ATCA-F125 and ATCA-F140
RJ45-DSUB-ATCA	Cable RJ45 to DSUB-9 female for ATCA-F140 and PrAMC-7311
SL-L3F140-01-001-STD	L3 protocol support

SOLUTION SERVICES

SMART Embedded Computing provides a portfolio of solution services optimized to meet your needs throughout the product lifecycle. Design services help speed time-to-market. Deployment services include worldwide technical support. Renewal services enable product longevity and technology refresh.

CONTACT DETAILS

+1 602-438-5720

Info@smartembedded.com

www.smartembedded.com/ec/contact

The stylized "S" and "SMART", and the stylized "S" combined with "SMART" and "Embedded Computing" are trademarks of SMART Modular Technologies, Inc. Intel, the Intel logo, and Intel Core are trademarks of Intel Corporation in the United States and/or other countries. PICMG, AdvancedTCA, ATCA and the AdvancedTCA logo are trademarks of PICMG. All other trademarks and registered trademarks are the property of their respective companies. ©2019. All rights reserved. For full legal terms and conditions, please visit www.smartembedded.com/ec/legal

ATCA-F140 DS 18Feb2020



www.smartembedded.com