
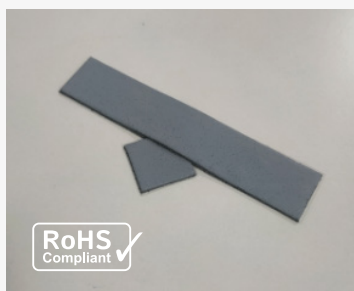


Thermal Pad BDA-01265

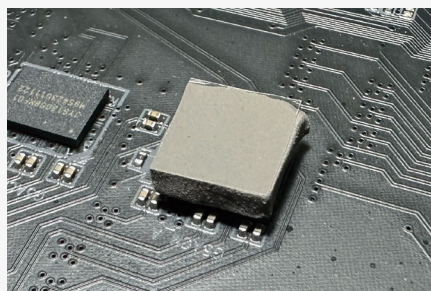

Features


- Thermal Conductivity :12.0W/m·K
- Excellent flame retardancy
- Good Compressibility and Elasticity
- Good electrical insulation performance
- Easy For Installation

Applications


- Communication hardware
- Memory Modules
- Mass Storage Devices
- Automotive Electronics
- Smartphones
- Semiconductor heat sink

BDA -01265 thermal pad conductive silicone sheet is used to fill the interface of two objects, so that the air from the interface is discharged and the thermal conductivity is improved. The product has self-adhesive, can be die-cut into a variety of shapes, easy assembly. The thermal conductivity is 12.0 W/m. K

■ Compression Ratio

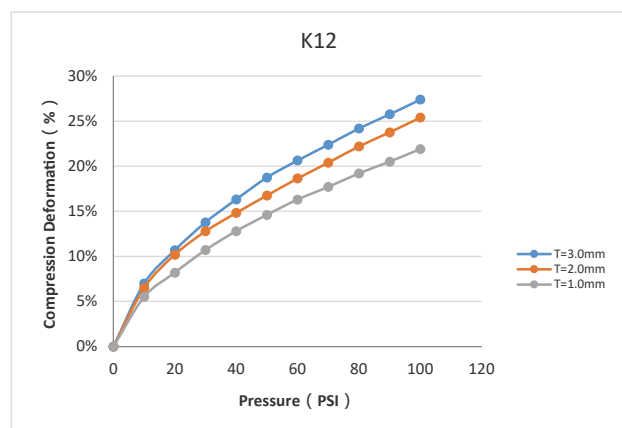

■ Thermal Resistance VS Pressure

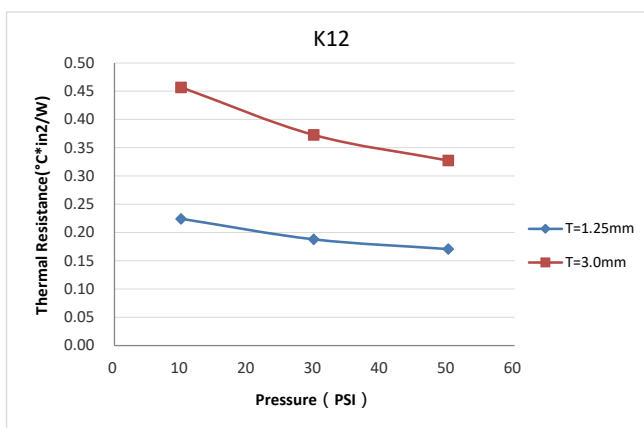

Parameter

Project	Thermal Pad BDA-01 265	Test Method
Thermal Conductivity(W/m·K)	12.0	ASTM D5470
Operating Temperature (°C)	-50~200	—
Color	TBA	Visual
Density (g/cm ³)	2.9	ASTM D792
Thickness Range (mm)	1.0~3.0	ASTM D374
Thickness Tolerance> 1mm	±10%mm	—
Hardness (Shore 00)	50~70	ASTM D5470
Breakdown Voltage (KV AC/mm)	>7	ASTM D149
Volume Resistivity (Ohm·cm)	10 ¹³	ASTM D257
Dielectric Constant@1MHz	>6	ASTM D150
UL Flammability Rating	V0	UL 94
ROHS/HF/REACH	PASS	—

Storage in shade, Storage temperature: ≤30 °C, Storage humidity: ≤70%
12 months from the date of manufacture